

POZZETTI PORTA VETRO

COOLER WITH GLASS HINGED LIDS



BL 65 F

Frigo pozzetto bevande.
Can cooler.



Capienza / Capacity

Bottiglia cl. 33 / Bottle cl. 33

BL 65 F

40

Lattina cl. 33 / Can cl. 33

50

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging




Ruote
Rollers



Maniglia integrata
Built-in handle



Cestello
Basket

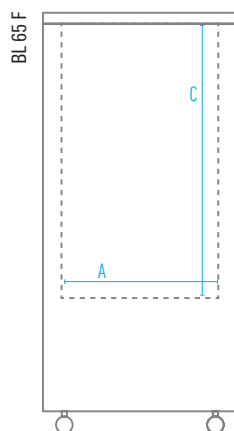

Dimensioni mm / Dimensions mm	BL 65 F
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	Ø 445 x 965
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	460 x 460 x 1015
A - Larghezza / Width	Ø 360
B - Profondità / Depth	Ø 360
C - Altezza / Height	630
Adesivo Frontale / Front Sticker	1380 x 871

Caratteristiche Tecniche / Technical Features	BL 65 F
Temperatura / Temperature Range	0 °C / +10 °C
Classe Climatica / Climate Class	B
Volume Netto-Lordo / Net-Gross Volume	Lt. 62 / 65
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	ABS
Cestelli / Baskets	Si / Yes
Termometro / Thermometer	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical
Rumorosità / Noise level	dB 47
Spessore isolamento / Insulation thickness	mm 40
Sbrinamento Defrost	Automatico a fermo compressore Automatic compressor cycle
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors h 38mm (1 ruota con freno / 1 castor with brake)
Peso Netto-Lordo / Net-Gross Weight	Kg 23 / 28
Voltaggio / Voltage	V 220-240
Frequenza / Frequency	Hz 50
Refrigerante / Refrigerant	R134A/R600A
Assorbimento / Absorption	W 100
Consumo Energia / Energy Consumption	Kwh/24H 0,39