

Entry Max

Code	Model	Dimensions LxWxH cm			
P07EN10088	MAX 12	↔ 99	↗ 127	↕ 68	
	Control	Chamber height cm		Cooking surface cm	
	Manual	15		70x105	
	Pizza Capacity	Max Temperature		Weight Kg	
	6 x Ø 30/34	 450 °C		 155	
	Total Power KW	Voltage V	Phases Ph	Frequency Hz	
	14,60	400	3N+T	50/60	



Entry Max

Code

P07EN10088

Model

MAX 12

General Features

Stackable up to 3 single units.

Available in the version with a completely refractory stone.

Reduced heating, cooking times, and total energy consumption.

Reaches up to 450°C for all baking needs.



Entry Max


Code

P07EN10088

Model

MAX 12

Options

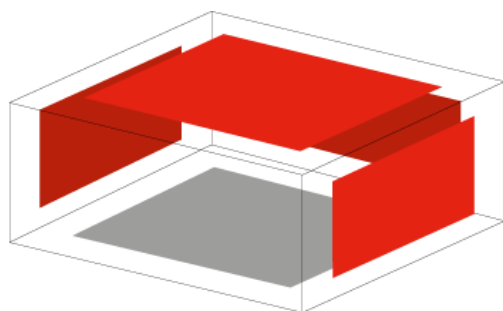

ENTRY MAX REFRACTORY CHAMBER

INTERNAL CHAMBER COVERED WITH REFRACTORY STONE

Cooking surface dimensions (L x W x H cm)

Code



67x103,5

S950O65010



Entry Max

Code
P07EN10088

Model
MAX 12

Accessories



SUPPORT ENTRY MAX
SUPPORT IN STAINLESS STEEL

	Code	Model	Size with feet cm	Size with wheels cm	Internal dimensions	Peso
	P11FN55006	S12	99x112x85/88	S12 99x112x86	82x95x53	30

Option **wheels**
Set of 4 rotating wheels 2 con freno + 2 senza freno

 Code
S66RU65003



Entry Max

Code
P07EN10088

Model
MAX 12

Accessories



ENTRY MAX HOOD

STAINLESS STEEL HOOD SMOKE OUTLET DIAMETER 125-200mm

	Code	Model	Voltage V	Phases Ph	Frequency Hz	Light	Dimensions cm	Peso
	P13EN10011	K6 - K12	230	1N + T	50	S	99x123x15	13

Option

EXTRACTOR HOOD MOTOR

ELECTRIC SUCTION MOTOR (POWER CONSUMPTION 50 W) With speed adjustment - power 313 m3/h


	Code	Power Supply V	Phases Ph	Frequency Hz	Net weight Kg
	S66MT55001	230	1N + T	50	3



Entry Max

Code
P07EN10088

Model
MAX 12

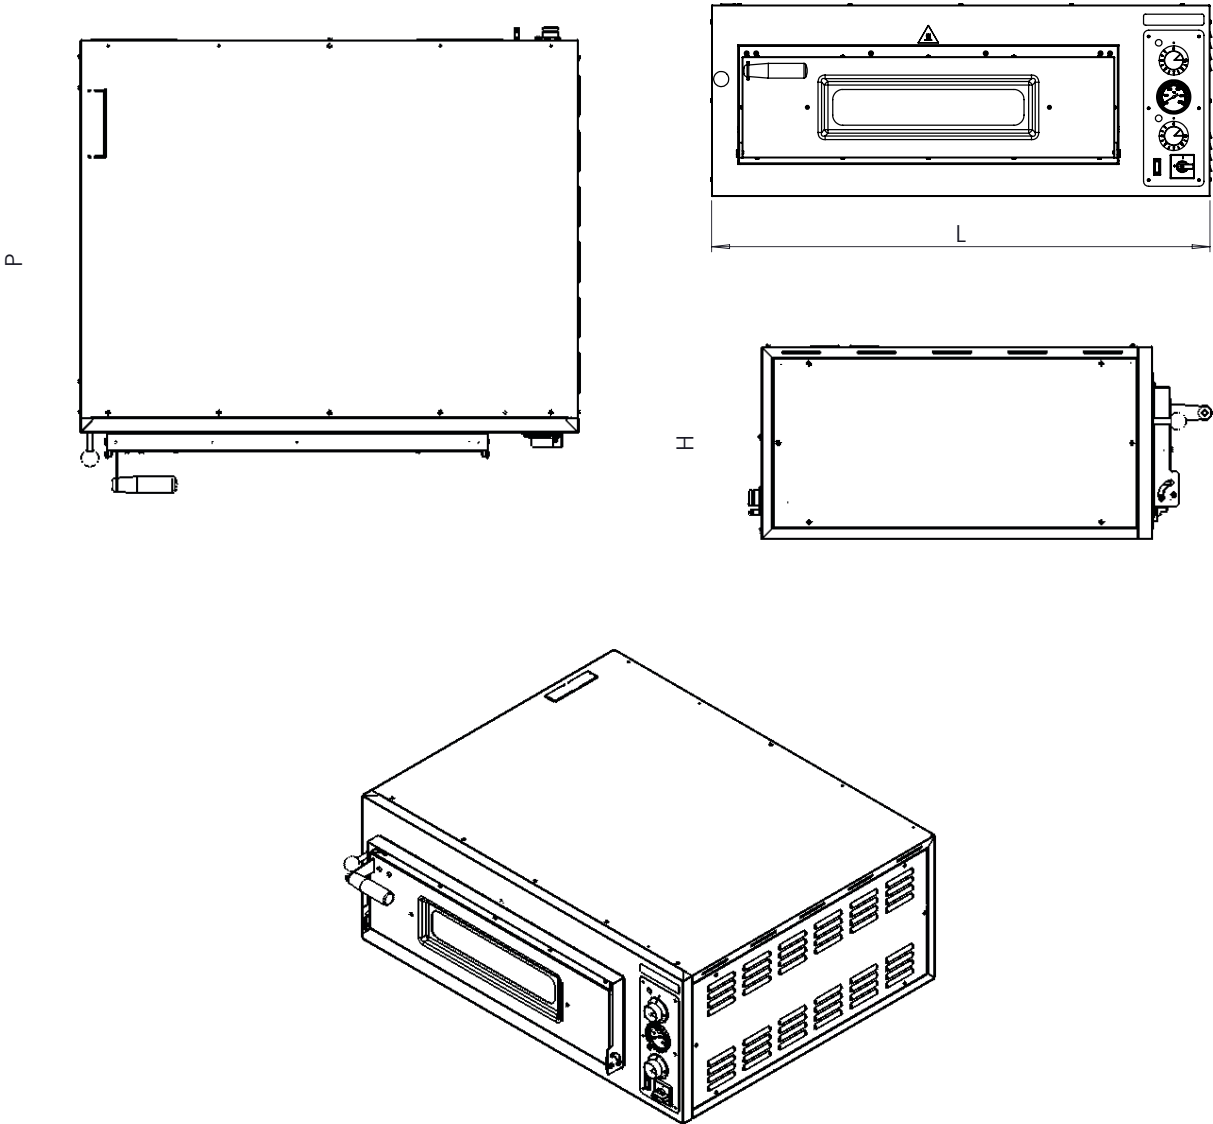

MOD	COD	DIMENSIONS (cm)		
		L	P	H
4	P07EN10083	99	92	38
6	P07EN10084	99	127	38
6L	P07EN10085	134	92	38
9	P07EN10086	134	127	38
8	P07EN10087	99	92	68
12	P07EN10088	99	127	68
12L	P07EN10089	134	92	68
18	P07EN10090	134	127	68

