

Pyrallis

With door open +5cm depth

Code	Model	Dimensions LxWxH cm			
P08PY12075	PY D12L	↔ 148	↗ 103	↕ 72	
	Control	Chamber height cm		Cooking surface cm	
	Digital	15		105x70	
	Pizza Capacity	Max Temperature		Weight Kg	
	6 x Ø 30/34 (x2)	 450 °C		 231	
	Total Power KW	Voltage V	Phases Ph	Frequency Hz	
	18,00	400	3N+T	50/60	




General Features

Designed to meet and exceed the expectations of even the most demanding professionals, providing high performance, quality, and service.	Excellent Performance: Robust, suitable for intensive use and various types of dough, ensuring even baking.	Style, quality, and the guarantee of Made in Italy are also reflected in the aesthetics of the product, making it the perfect solution for "front of house" installations.	The line includes a complete range of models with capacities from 4 to 18 pizzas , considering a Ø of 33 cm.
It is equipped with high-performance Activestone technology and can be ordered with a complete refractory chamber for even greater thermal efficiency.	Ultra-fast heating with a 50% reduction in heating time and energy consumption up to 25%, compared to a traditional heating system.	Mechanical or digital control panel: the digital model offers extreme precision in temperature setting, can store up to 2 programs, and has a programmed ignition and shutdown function.	Maximum temperature of 450 °: perfect for any type of dough, even for highly hydrated products that require a very short cooking time, such as Neapolitan pizza.
All models boast a robust stainless steel structure, easy-to-open doors, and an ergonomic handle.	Dual internal 12V lighting and double glass for greater heat preservation.	Stainless Steel Aspirating Hood, Ø outlet 200mm.	Controlled opening and closing chimney valve.



Options

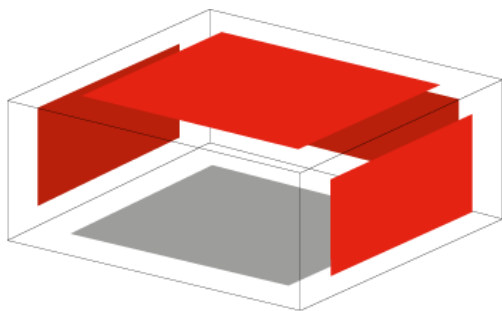

PYRALIS REFRACTORY CHAMBER
INTERNAL CHAMBER COVERED WITH REFRACTORY STONE

	Cooking surface dimensions (L x W x H cm)	Refractory net weight kg	Code
	102x68,5x15	15	S08TL64019



Pyralis

Code
P08PY12075

Model
PY D12L

Accessories



SUPPORT PYRALIS

SUPPORT IN STAINLESS STEEL WITH SUPPORT SURFACE

	Code	Model	Size with feet cm	Size with wheels cm	Internal dimensions	Peso
	P11FN64006	S12L	147 x 85 x 92/95	147 x 85 x 93	124 x 62 x 60	42

Option

wheels

Set of 4 rotating wheels 2 with brake + 2 without brake

Code

S66RU65003



Accessories



PYRALIS ASPIRATING HOOD

STAINLESS STEEL HOOD SMOKE OUTLET DIAMETER 200mm

	Code	Model	Voltage V	Phases Ph	Frequency Hz	Light	Dimensions cm	Peso
	P13PY10019	K6L - 12L	230	1N + T	50	S	146x116,3x29,5	50

Option

EXTRACTOR HOOD MOTOR

ELECTRIC SUCTION MOTOR (POWER CONSUMPTION 110 W) With control unit for speed adjustment - power 980 m3/h

	Code	Power Supply V	Phases Ph	Frequency Hz	Net weight Kg
	S66MT64002	230	1N + T	50	3



Pyralis

Code

P08PY12075

Model

PY D12L



L



P



H

Con porta aperta +5cm profondità
With door open +5cm depth
Avec la porte ouverte +5cm de profondeur

MOD	COD	DIMENSIONS (cm) L x P x H
PY M4	P08PY10032	113x101x51
PY D4	P08PY12029	113x101x51
PY M6	P08PY10033	113x136x51
PY D6	P08PY12030	113x136x51
PY M6L	P08PY10034	148x101x51
PY D6L	P08PY12031	148x101x51
PY M9	P08PY10035	148x136x51
PY D9	P08PY12032	148x136x51
PY M8	P08PY10036	113x101x83
PY D8	P08PY12033	113x101x83
PY M12	P08PY10037	113x136x83
PY D12	P08PY12034	113x136x83
PY M12L	P08PY10038	148x101x83
PY D12L	P08PY12035	148x101x83
PY M18	P08PY10039	148x136x83
PY D18	P08PY12036	148x136x83

