

# Pyralis

**With door open +5cm depth**

|                                                                                   |                  |                                                                                          |                                                                                     |              |  |
|-----------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|--|
| Code                                                                              | Model            | Dimensions LxWxH cm                                                                      |                                                                                     |              |  |
| <b>P08PY10068</b>                                                                 | PY M8            | ↔ 113                                                                                    | ↗ 103                                                                               | ↕ 72         |  |
| Control                                                                           |                  | Chamber height cm                                                                        | Cooking surface cm                                                                  |              |  |
|  | Manual           | 15                                                                                       | 70x70                                                                               |              |  |
| Pizza Capacity                                                                    |                  | Max Temperature                                                                          | Weight Kg                                                                           |              |  |
|  | 4 x Ø 30/34 (x2) |  450 °C |  | 183          |  |
| Total Power KW                                                                    |                  | Voltage V                                                                                | Phases Ph                                                                           | Frequency Hz |  |
|  | 13,20            | 400                                                                                      | 3N+T                                                                                | 50/60        |  |




## General Features

|                                                                                                                                                        |                                                                                                                                     |                                                                                                                                                                                          |                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designed to meet and exceed the expectations of even the most demanding professionals, <b>providing high performance, quality, and service.</b>        | <b>Excellent Performance:</b><br>Robust, suitable for intensive use and various types of dough, ensuring even baking.               | Style, quality, and the guarantee of Made in Italy are also reflected in the aesthetics of the product, making it the perfect solution for "front of house" installations.               | The line includes a <b>complete range of models with capacities from 4 to 18 pizzas</b> , considering a Ø of 33 cm.                                              |
| It is equipped with high-performance Activestone technology and can be ordered with a complete refractory chamber for even greater thermal efficiency. | Ultra-fast heating with a 50% reduction in heating time and energy consumption up to 25%, compared to a traditional heating system. | Mechanical or digital control panel: the digital model offers extreme precision in temperature setting, can store up to 2 programs, and has a programmed ignition and shutdown function. | Maximum temperature of 450 °: perfect for any type of dough, even for highly hydrated products that require a very short cooking time, such as Neapolitan pizza. |
| All models boast a robust stainless steel structure, easy-to-open doors, and an ergonomic handle.                                                      | Dual internal 12V lighting and double glass for greater heat preservation.                                                          | Stainless Steel Aspirating Hood, Ø outlet 200mm.                                                                                                                                         | Controlled opening and closing chimney valve.                                                                                                                    |



## Options

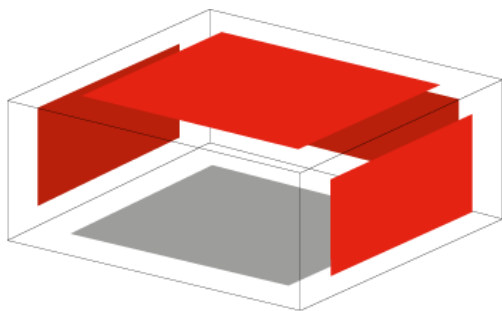

**PYRALIS REFRACTORY CHAMBER**  
INTERNAL CHAMBER COVERED WITH REFRACTORY STONE

|                                                                                     | Cooking surface dimensions (L x W x H cm) | Refractory net weight kg | Code              |
|-------------------------------------------------------------------------------------|-------------------------------------------|--------------------------|-------------------|
|  | 67x68,5x15                                | 15                       | <b>S08TL64017</b> |



# Pyralis

Code  
**P08PY10068**

Model  
**PY M8**

## Accessories



### SUPPORT PYRALIS

SUPPORT IN STAINLESS STEEL WITH SUPPORT SURFACE

|                                                                                     | Code              | Model | Size with feet cm | Size with wheels cm | Internal dimensions | Peso |
|-------------------------------------------------------------------------------------|-------------------|-------|-------------------|---------------------|---------------------|------|
|  | <b>P11FN64002</b> | S8    | 112 x 85 x 92/95  | 112 x 85 x 93       | 89 x 62 x 60        | 44   |

### Option

#### wheels

Set of 4 rotating wheels 2 with brake + 2 without brake

Code

**S66RU65003**



## Accessories



### PYRALIS ASPIRATING HOOD

STAINLESS STEEL HOOD SMOKE OUTLET DIAMETER 200mm

|  | Code              | Model  | Voltage V | Phases Ph | Frequency Hz | Light | Dimensions cm  | Peso |
|-------------------------------------------------------------------------------------|-------------------|--------|-----------|-----------|--------------|-------|----------------|------|
|                                                                                     | <b>P13PY10017</b> | K4 - 8 | 230       | 1N + T    | 50           | S     | 111x116,3x29,5 | 40   |

### Option

#### EXTRACTOR HOOD MOTOR

ELECTRIC SUCTION MOTOR (POWER CONSUMPTION 110 W) With control unit for speed adjustment - power 980 m3/h

|  | Code              | Power Supply V | Phases Ph | Frequency Hz | Net weight Kg |  |
|-------------------------------------------------------------------------------------|-------------------|----------------|-----------|--------------|---------------|---------------------------------------------------------------------------------------|
|                                                                                     | <b>S66MT64002</b> | 230            | 1N + T    | 50           | 3             |                                                                                       |



# Pyralis

Code

**P08PY10068**

Model

**PY M8**



**L**



**P**



**H**

Con porta aperta +5cm profondità  
With door open +5cm depth  
Avec la porte ouverte +5cm de profondeur

| MOD            | COD        | DIMENSIONS (cm)<br>L x P x H |
|----------------|------------|------------------------------|
| <b>PY M4</b>   | P08PY10032 | <b>113x101x51</b>            |
| <b>PY D4</b>   | P08PY12029 | <b>113x101x51</b>            |
| <b>PY M6</b>   | P08PY10033 | <b>113x136x51</b>            |
| <b>PY D6</b>   | P08PY12030 | <b>113x136x51</b>            |
| <b>PY M6L</b>  | P08PY10034 | <b>148x101x51</b>            |
| <b>PY D6L</b>  | P08PY12031 | <b>148x101x51</b>            |
| <b>PY M9</b>   | P08PY10035 | <b>148x136x51</b>            |
| <b>PY D9</b>   | P08PY12032 | <b>148x136x51</b>            |
| <b>PY M8</b>   | P08PY10036 | <b>113x101x83</b>            |
| <b>PY D8</b>   | P08PY12033 | <b>113x101x83</b>            |
| <b>PY M12</b>  | P08PY10037 | <b>113x136x83</b>            |
| <b>PY D12</b>  | P08PY12034 | <b>113x136x83</b>            |
| <b>PY M12L</b> | P08PY10038 | <b>148x101x83</b>            |
| <b>PY D12L</b> | P08PY12035 | <b>148x101x83</b>            |
| <b>PY M18</b>  | P08PY10039 | <b>148x136x83</b>            |
| <b>PY D18</b>  | P08PY12036 | <b>148x136x83</b>            |

