

FRIGO VETRINE VERTICALI VISICOOLER

❄ 0 °C / +10 °C



CLS 372 V BLACK

Frigo vetrina bibite statica con agitatore.
Static-fan assisted visicooler.



CLS 372 V WHITE

Frigo vetrina bibite statica con agitatore.
Static-fan assisted visicooler.



Profilo porta in alluminio
Aluminum door




Illuminazione Led
Led lighting




Vetro anti appannamento
Low-e glass



SCHEDA TECNICA TECHNICAL SHEET

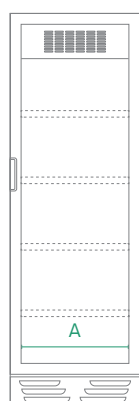

FRONTE FRONT

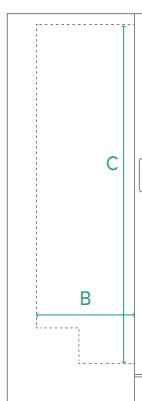

LATO SIDE

CAPACITÀ CAPACITY

btg btl 33cl 	210 pz pc
btg btl 66cl 	150 pz pc
btg btl 75cl 	126 pz pc
btg btl 50cl 	210 pz pc
btg btl 1l 	86 pz pc
lattina can 33cl 	560 pz pc

Dati indicativi e variabili a seconda dei diversi packaging
Variable data depending on the different packaging

DIMENSIONI DIMENSIONS	CLS 372 V
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	600 x 640 x 1765 mm
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	650 x 670 x 2040 mm
A - Larghezza Width	505 mm
B - Profondità Depth	460 mm
C - Altezza Height	1508 mm
Adesivo Laterale Side Sticker	530 x 1710 mm
Adesivo Vetro Glass Sticker	498 x 1488 mm
Container 40' HQ	71 pz pc

INFORMAZIONI TECNICHE TECHNICAL INFORMATION	CLS 372 V
Temperatura Temperature range	0° C / +5° C
Classe climatica Climate class	ST
Volume netto - Volume lordo Net volume - Gross volume	305 - 308 lt
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie interna Inner liner	ABS
Regolatore temperatura Controller	Meccanico Mechanical
Termometro Thermometer	Digitale Digital
Rumorosità Noise level	52 dB
Spessore isolamento Insulation thickness	45 mm
Sbrinamento Defrost	Manuale Manual
Illuminazione Lighting	1 led verticali 1 vertical led
Chiusura automatica porta Self closing door	Si Yes
Chiave e serratura Lock and key	Si Yes
Reversibilità porta Reversible door	No
Mensole (LxP) Shelves (WxD)	5 Ripiani Shelves 493 x 376 mm
Ruote / piedi Castors / feet	2 Piedi + 2 ruote 2 feet + 2 castors
Peso netto / Peso lordo Net weight / Gross weight	66 - 77 kg
Frequenza / Voltaggio Frequency / Voltage	50 Hz - 220V
Refrigerante Refrigerant	R290
Assorbimento Absorption	220 Watt
Consumo Energia Energy Consumption	2,074 kWh/24h